





FILE NO: E362910

**SPECIFICATIONS**

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C  
 Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

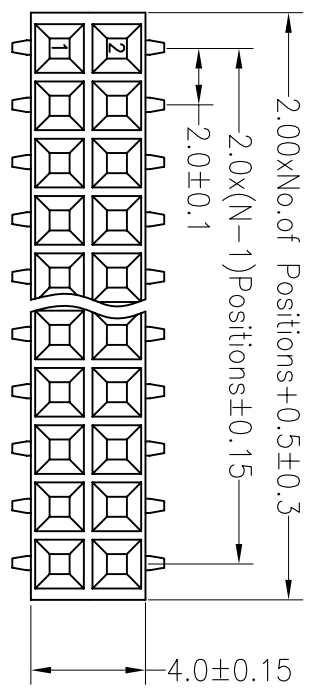



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

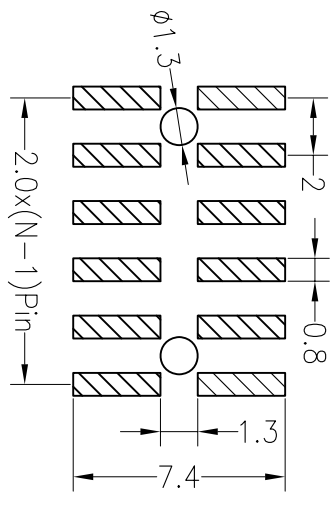

**Ordering Information**

2363 02 XX X X XX M Y X 01

No.of Pins Per Row 2x40  
 Insulator Material Option  
 A=BK-PBT  
 B=BK-PA66  
 C=BK-PA6T  
 D=BK-PA46  
 F=BK-LCP  
 Post w=with Post N=w/o post  
 Contact Plating  
 G1:1U" Gold  
 G2:1.5U" Gold  
 G3:2U" Gold  
 G4:3U" Gold  
 G5:5U" Gold  
 G6:10U" Gold  
 G7:15U" Gold  
 S0:Gold Flash/Tin SM:Tin  
 Packing  
 O=PE Bag  
 A=Troy  
 T=Tube  
 P=Lube+Cap  
 R=Reel+Cap  
 M=Reel+My/cr  
 code stream 01~99

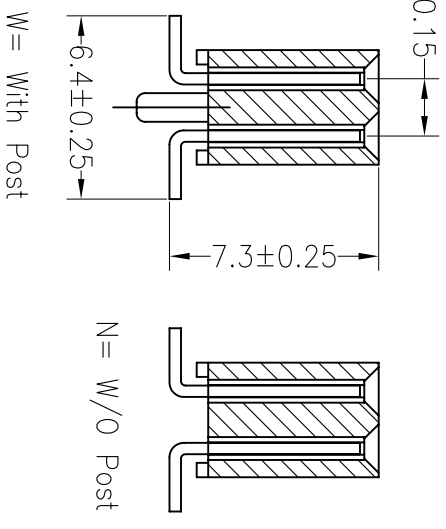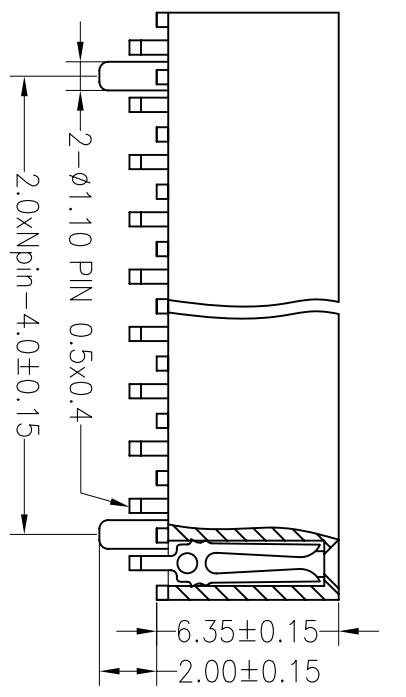

OPERATION		DRAW		WZG		SCALE		FIT		PART NO.	
X.X	±0.30			14.04.18		UNIT	mm	A4	1/1	236302XXXXXXXXXX01	
X.XX	±0.20	CHECK				SIZE	A4			SHENZHEN JINLING ELECTRONIC CO.,LTD	
X.XXX	±0.10					SHEET	1/1			深圳市锦凌电子有限公司	
Angle	±3°	APPROVE				PROJ.				Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
DIM	TOL					TITLE:		2.00PF H6.35mm 2xNpin SMT贴片			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.04.18	NEW DRAWING	
1			

OPERATION		DRAW		WZG		SCALE		FIT		PART NO.	
X.X	±0.30			14.04.18		UNIT	mm	A4	1/1	236302XXXXXXXXXX01	
X.XX	±0.20	CHECK				SIZE	A4			SHENZHEN JINLING ELECTRONIC CO.,LTD	
X.XXX	±0.10					SHEET	1/1			深圳市锦凌电子有限公司	
Angle	±3°	APPROVE				PROJ.				Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
DIM	TOL					TITLE:		2.00PF H6.35mm 2xNpin SMT贴片			