
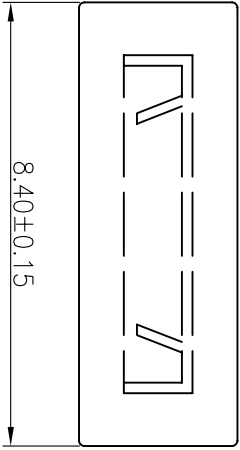
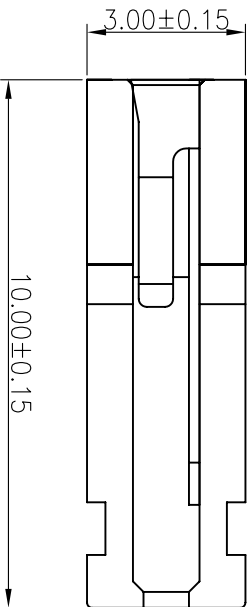


HSE ROHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

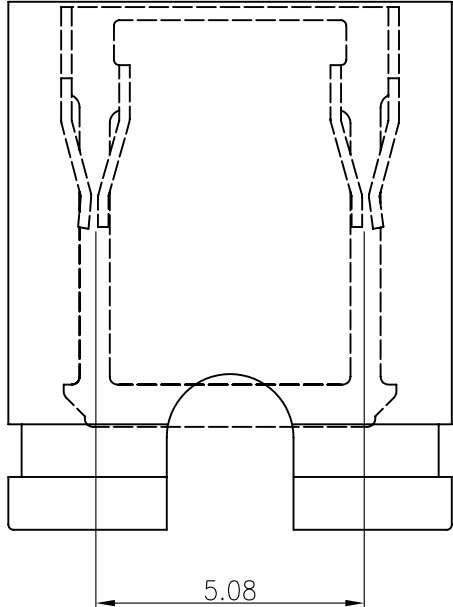

Ordering Information

3813 100 01 O XX B 01

Plastics Height
 49=4.9mm
 60=6.0mm
 135=13.5mm

No. of Pins
 01=Sing Type

Contact Plating
 G1: 1U" Gold
 NO: 1U" Gold/Ni
 NI: Ni

Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YYSsheng	12.04.18	SCALE		FIT	PROJ.	TITLE:
				X.X	±0.30				UNIT	mm			
A0	2012.04.18	NEW DRAWING		X.XX	±0.20	CHECK			A4	1/1			3813100010XXB01
1				Angle	±3°	APPROVE			SHEET	1/1			5.08 Mini Jumper HI0.0 1*2Pin Open Type

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 3813100010XXB01
 TITLE: 5.08 Mini Jumper HI0.0 1*2Pin Open Type