



**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

**Ordering Information**


**3210 XX M XX X B K00 X 01**

No. of Pins: 06-64P




Contact Plating:  
 G0:Gold Flash  
 G1:1.0U" Gold  
 G2:1.5U" Gold  
 G3:2U" Gold  
 G4:3U" Gold  
 G5:5U" Gold  
 G6:10U" Gold  
 G7:15U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin

Insulator Material Option:  
 A=BK-PBT  
 C=BK-PA6T  
 D=BK-PA46  
 E=BK-PA9T  
 F=BK-LCP

Packing code stream:  
 0=PE Bag  
 A=Troy  
 T=Tube  
 P=Tube+Cap  
 01~99

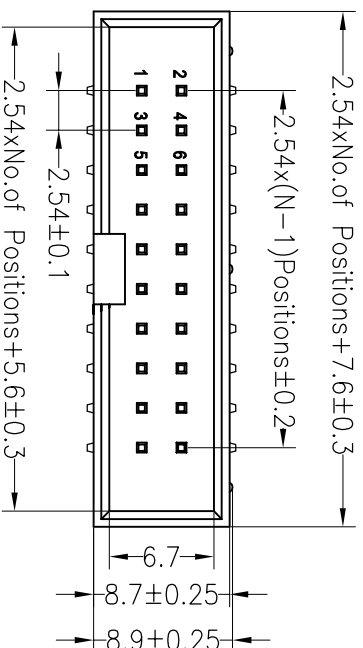

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

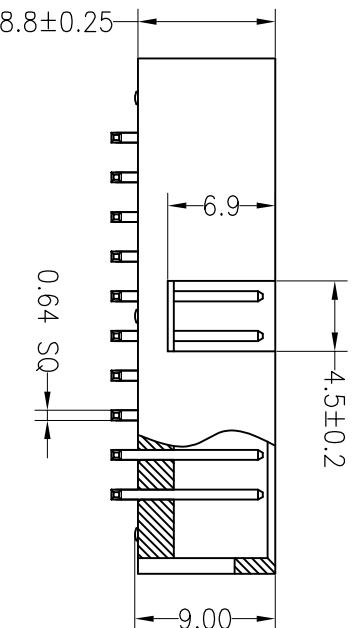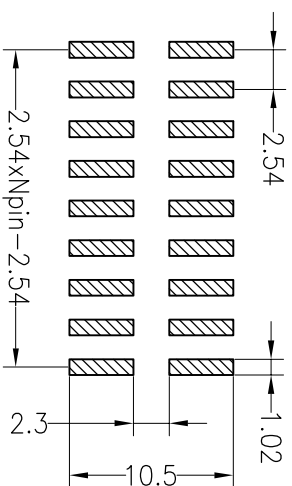

OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X	±0.30	JinChengXin	19.09.21	UNIT	mm	A4	1/1	PART NO. 3210XXMXXXXBK00X01	
X.XX	±0.20	CHECK		SIZE				2.54mm Box Header H8.8mm SMT	
X.XXX	±0.10	APPROVE		SHEET					
Angle	±3°			PROJ.					
DIM	TOL								
CHANGE									
REV	DATE	MODIFICATION DESCRIPTION							
A0	2019.09.21	NEW DRAWING							
1									

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892