

SPECIFICATIONS







Rated(额定参数): 150V,8A
 Dielectric strength(抗电强度): AC1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Wire Range(线径):26~16AWG
 Strip length(剥线长度):10mm
 Temp. range(操作温度): -40°C~+105°C
 MAX Soldering(瞬时温度):+250°C,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Reed(弹片): Stainless steel (不锈钢)
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)
 Button(手柄): POM, Color:Orange
 Screw (螺丝): M2.0 Steel, Zinc plating(钢,镀锌)

PITCH RANGE	NOMINAL DIMENSION RANGE					
	IN MM	IN MM	IN MM	IN MM	IN MM	IN MM
TO 6	6	10	TO 30	30	TO 100	100
TO 10	10	24	TO 30	60	TO 100	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70
						±1.00

Ordering Information

JL15EDGKNHM - 350 XX G 0 1

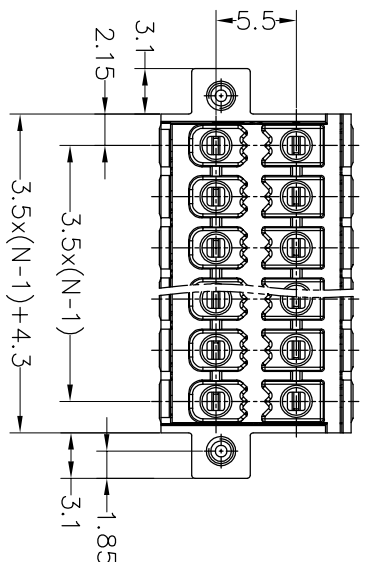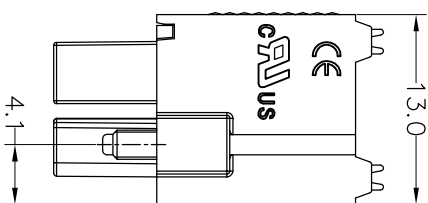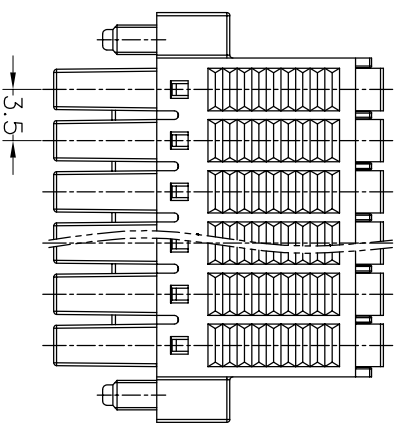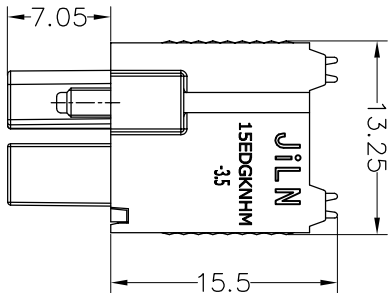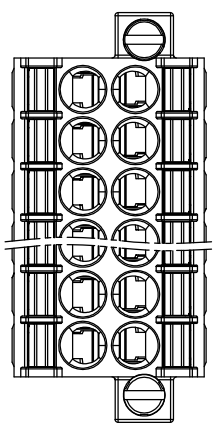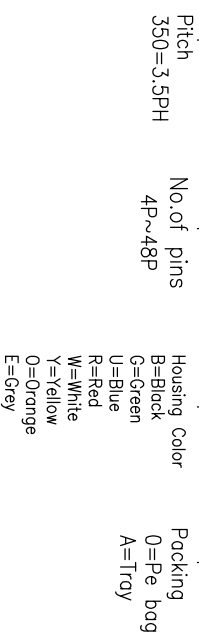

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	TITLE:
	CHECK	LICHAO LIU	UNIT	mm		
APPROVE	YONGLIANG GAO		SIZE	A4	JL15EDGKNHM-350XXG01	JL15EDGKNHM-3.5-2XNPE插拔式母座/绿色/带耳
			SHEET	1/1		
			PROJ.			

JILIN 东莞市锦凌电子有限公司
 DONGGUAN JINLING ELECTRONIC CO., LTD